MC-585

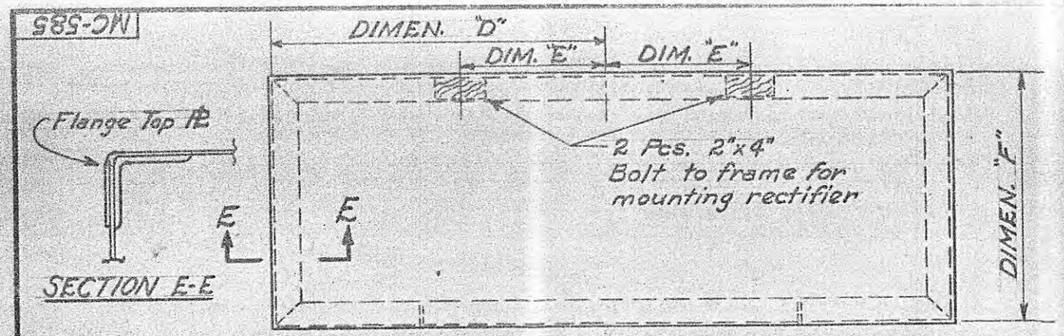

SECTION E-E

TOP

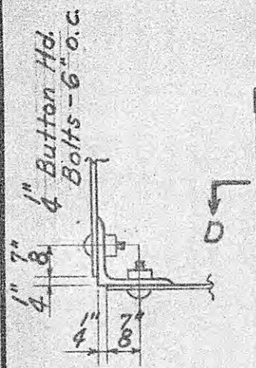

SECTION D-D

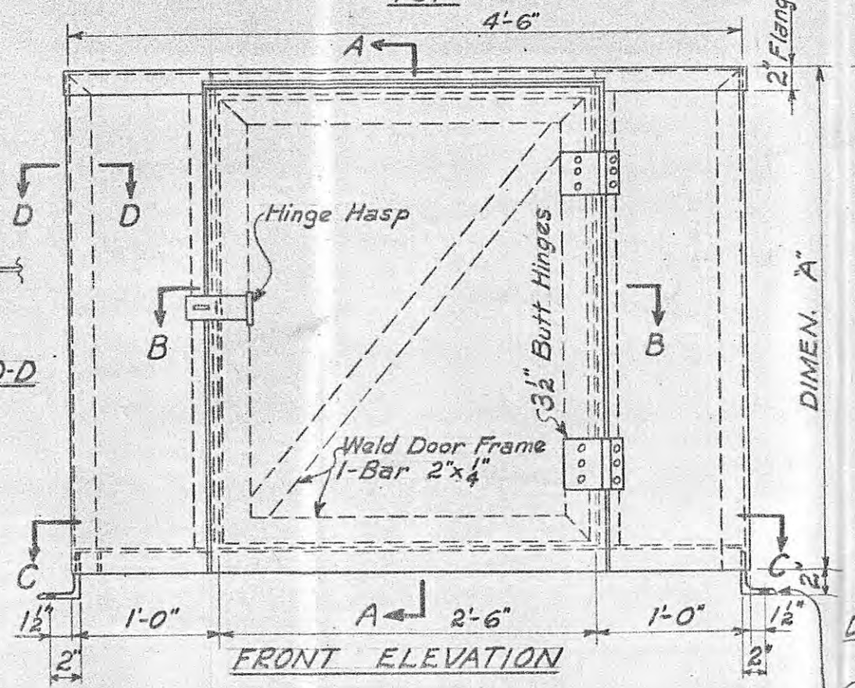

FRONT ELEVATION



SECTION F-F
Thru Louvre

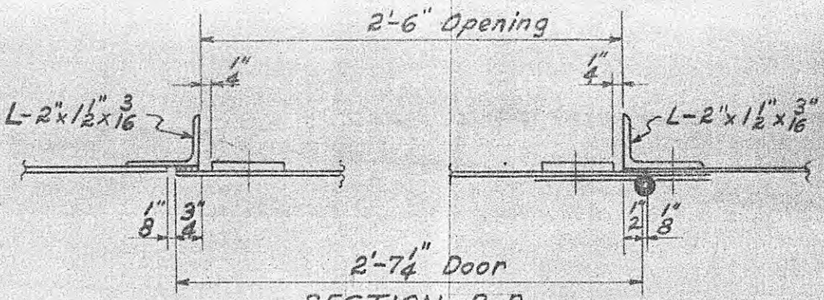

SECTION B-B
Thru Door

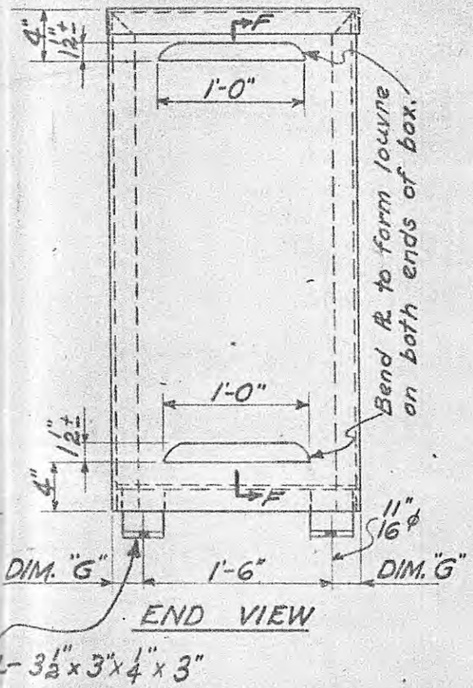

END VIEW

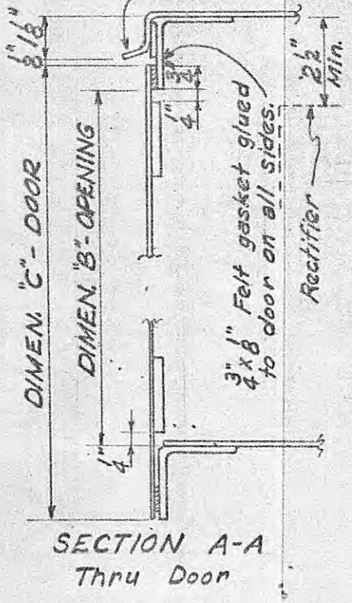

SECTION A-A
Thru Door

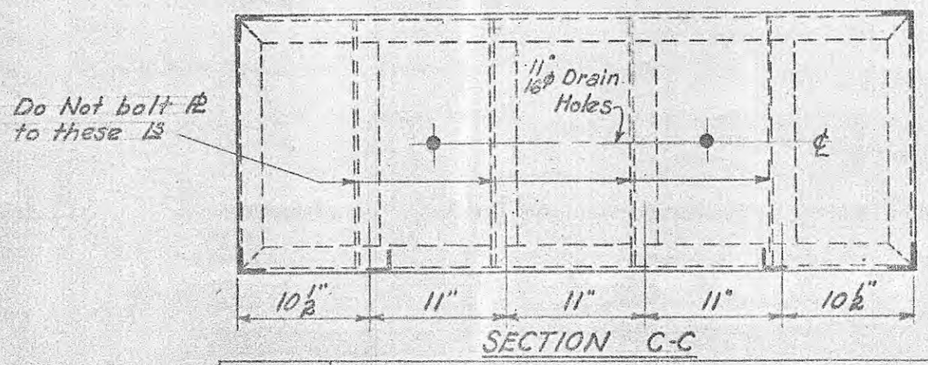

SECTION C-C

NOTES:

All Ls 2"x2"x3/16, or noted.

Plating No. 16 ga. steel.

Frame to be welded complete & plating to be bolted with ¼" Button Hd. Bolts spaced abt. 6" o.c.

Contact areas to be painted with red lead paint and linseed oil before assembling.

Inside of box to be coated with acid resisting paint.

Outside of box to be painted with aluminum paint.

FIG. NO.	A	B	C	D	E	F	G
3	4'-4"	4'-0"	4'-2¾"	2'-3"	1'-2¼"	2'-3"	0'-4½"
2	4'-4"	4'-0"	4'-2¾"	2'-3"	1'2¼"	1'-11"	0'-2½"
1	3'-4"	3'-0"	3'-2¾"	1'-1"	0'-4	1'-11"	0'-2½"

REV. NO.	DATE	DSGN.	DRWN.	CHKD.	SUPV.	APPD.
4	10-21-67		PM			RE

REDRAWN

DSGN. _____ SUPV. _____

DRWN. JHS W.O. _____

CHKD. _____ PROJ. ENGR. _____

TENNESSEE VALLEY AUTHORITY
DIVISION OF POWER PLANNING AND ENGINEERING

SUBSTATIONS GENERAL
BOX FOR BATTERY AND RECTIFIER

DATE 8-5-35 | SUBMITTED E M Hulse | APPROVED Hortzber

SCALE NONE | CLASS. CODE

SHEET OF SHEETS

MC-585

Copy 3 of 3

R4